展开尺寸: 290*210mm 工艺: 双面印刷, 折页

2.0	
) CC	
MP	
JTE	
R ≤	
2.0 COMPUTER MULTIMEDIA SPEAKEI	
ME	
DIA	
SPE	
AK:	
<u> </u>	





MODEL NO.:V320

✓ F8⊅ WARRANTY CARD

END-USER'S COPY WARRANTY REGISTRATION CERTIFICATE

Mr./Mrs/Ms First Name:	
	(Discourage) and the property of the control of the
	(Please print the name & addre

SECTION 1



www.fenda.com

F80 WARRANTY CARD

DISTRIBUTOR'S COPY WARRANTY REGISTRATION CERTIFICATE

Mr./Mrs/Ms First Name:
_ast Name:
Address:
Contact No.:
Product Name:
Model No.:
Serial No.:
Date Purchased:
Invoice No.:
Retail Outlet Where Purchased:
Total Oddot Wilder diolidood:

(Please print the name & address) SECTION 2

WARRANTY TERMS & CONDITIONS

The warranty will be effective only if the warranty card is completed and returned to the company within 14 days from the date of purchase. We guarantee the provision of free services of 🗷 🕬 product within the warranty period from its date of purchase from our Authorised Dealer. The period and conditions of our warranty service are as follow:

1. The warranty covers services by our 🗷 🕬 Authorised Dealer. This warranty card together with the receipt must be presented when servicing is required. This warranty card is irreplaceable in the event of loss.

2. Repair services will be provided for defects arising from normal usage for the following period, commencing from the date of purchase from our 🗷 🕬 Authorised Dealer. (Parts would be

B. Technical service free...... 1 year

3. Under the following circumstances, service and parts will be chargeable even within the warranty period: A. Failure to present the warranty card and receipt when servicing is required.

Full particulars not clearly shown or alterations made against the actual information. For e.g.: Alteration of the date of purchase, serial numbers-altered or removed. B. This unit being tampered with, altered in any way by any unauthorised technicians or which has been subjected to misuse, negligence or accident. This guarantee does not cover

damage occuring in transit by or from the customer. C. The defect is caused by the attack of household pests, fire , lighting , natural disasters, pollution, abnormal voltage or the usage of generator.

Shenzhen Fenda Technology Co., Ltd.

Add : Fenda Hi-Tech Park,Zhoushi Road,Shiyan,Baoan,Shenzhen,China P.C.: 518108 Http://www.fenda.com

- 1. Read Instructions All the safety and operating instructions should be read before the appliance is operated.
- 2. Read Instructions The operating instructions should be retained for future reference.
- 3. Follow Instructions All operating and user instructions should be followed.
- 4. Water And Moisture The appliance should not be used near water for example, near a bathtub, washbowl, kitchen sink, Laundry tub, in a wet basement, or near a swimming pool, ect. It should not be exposed to dripping or splashing water, and no Objects filled with liquid, such as a vase, should be placed on the appliance.
- 5. Outdoor Use Warning: To reduce the risk of fire of electric shock, do not expose this appliance to rain or moisture.
- 6. Location The appliance should be installed in a stable location. 7. Ventilation — The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings;
- Or placed in a built in installation, such as a closed bookcase or cabinet that may impede the flow of air through the ventilation openings. 8. Heat — The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.

· Built-in audio amplifier. FEATURES

• Adaptable to device with audio output, such as personal computer, MP3 player, etc. • Powered by computer USB port.

1. Speaker 1pair SYSTEM COMPOSITION

2. Operation manual 1 pc Warranty Card

SPECIFICATION

Power output: 2W+2W Speaker unit 2" full range driver

Impedance: 4ohm Frequency response: 24Hz - 20KHz signal input: 3.5mm stereo jack signal cable Separation: ≥ 35dB

S/N: ≥ 65dB Speaker dimension: W84XD71XH152mm Net weight: 0.60kg

WARRANTY TERMS & CONDITIONS ***********

The warranty will be effective only if the warranty card is completed and returned to the company within 14 days from the date of purchase. We guarantee the provision of free services of E F80 product within the warranty period from its date of purchase from our Authorised Dealer.

The period and conditions of our warranty service are as follow: 1. The warranty covers services by our 🗷 🚱 Authorised Dealer. This warranty card together with the receipt must be presented when servicing is required. This warranty card is irreplaceable in the event of loss.

2. Repair services will be provided for defects arising from normal usage for the following period, commencing from the date of purchase from our 🗷 🕬 Authorised Dealer. (Parts would be replaced when necessary)

B. Technical service free...... 1 year

3. Under the following circumstances, service and parts will be chargeable even within the warranty period:

A. Failure to present the warranty card and receipt when servicing is required. Full particulars not clearly shown or alterations made against the actual information.

For e.g.: Alteration of the date of purchase, serial numbers-altered or removed. B. This unit being tampered with, altered in any way by any unauthorised technicians or which has been subjected to misuse, negligence or accident. This guarantee does not cover


damage occuring in transit by or from the customer.

C. The defect is caused by the attack of household pests, fire , lighting , natural disasters, pollution, abnormal voltage or the usage of generator.

Shenzhen Fenda Technology Co., Ltd. Add: Fenda Hi-Tech Park,Zhoushi Road,Shiyan,Baoan,Shenzhen,China

P.C.: 518108 Http://www.fenda.com

INSTALLATION GUIDE

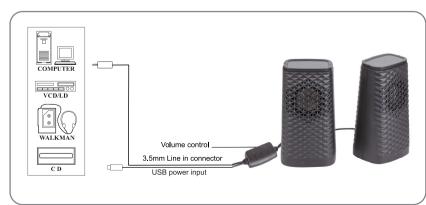

- 1. Switch on the computer.
- 2. Connect the USB power input and computer USB port by powercable provided. And then the power indicator will be turn on.
- 3. Connect the 3.5mm Line in connector to the audio output jack of audio source.
- 4. Turn the volume control knob clockwise to increase the volume level. Or turn anti-clockwise to decrease the volume level